


KEOR SPX UPS

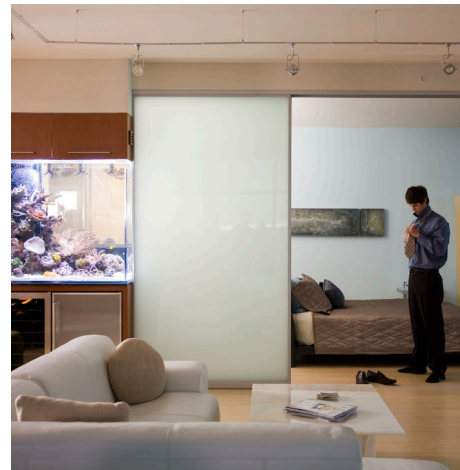

THE IDEAL SOLUTION FOR
ELECTRICAL NETWORK
DISTURBANCES

THE GLOBAL SPECIALIST IN ELECTRICAL AND DIGITAL
BUILDING INFRASTRUCTURES

 **legrand**[®]

KEOR SPX

Uninterruptible power supplies (UPS)



UPS for computers and audio and video equipment
 Complete protection: discharge, overload, short-circuit, thermal protection
 Supply button / LED indicators: provides a visual and audible indication of the UPS status
 Reset push-button for the circuit-breaker: for resetting in the event that the overload protection is activated
 Automatic start-up: when there is no mains supply or it is of poor quality, the UPS continues working using a battery and switches off if the network breaking time exceeds the back-up time

Pack	Single-phase UPS				
	UPS with output sockets 2 Multistandard on 600-800VA UPS 4 Multistandard on 1000-1500-2000VA UPS German standard input plug Input voltage: 162-290 V - 50-60 Hz Output voltage: 220/230/240V Ambient operating temperature: 0 to 40°C Relative humidity: 0 to 90%				
	Nominal power (VA)	Active power (W)	Back-up time (min)	Number of sockets	Communication ports
1	600	360	10 to 15	2	-
1	800	480	10 to 15	2	-
1	1000	600	10 to 15	4	USB
1	1500	900	10 to 15	4	USB
1	2000	1200	10 to 15	4	USB

KEOR SPX

Uninterruptible power supplies (UPS)

General characteristics					
Nominal power (VA)	600	800	1000	1500	2000
Active power (W)	360	480	600	900	1200
Technology	Line interactive VI				
Waveform	Pseudo-sinusoidal				
Input characteristics					
Input voltage	230 V				
Input frequency	50-60 Hz +/- 5Hz (autosensine)				
Input voltage range	162 V-290 V				
Output characteristics					
Output voltage	220/230/240V				
Output frequency (nominal)	50/60 Hz +/-1%				
Batteries					
Number of batteries	1	1	2	2	2
Battery range type/voltage	12 V, 7 Ah	12 V, 9 Ah	12 V, 7 Ah	12 V, 9 Ah	12 V, 9 Ah
Communication and management					
Screen and signalling	One button and 1 LED for real-time control		One button and 3 LEDs for real-time control		
Remote control	Available				
Mechanical characteristics					
Dimensions H x W x D (mm)	142x101x279		182x130x320		
Net weight (kg)	4,2	4,9	8,2	10,4	10,6
Ambient conditions					
Ambient operating temperature (°C)	0 to 40°C				
Relative humidity (%)	0 to 90%				
Noise at 1 m (dB)	< 40				

NOTE: The stated back-up times in minutes are estimated and may vary according to the load characteristics, operating conditions and environment.

